

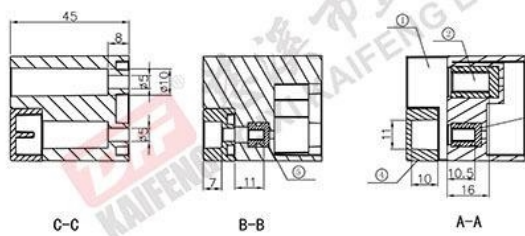
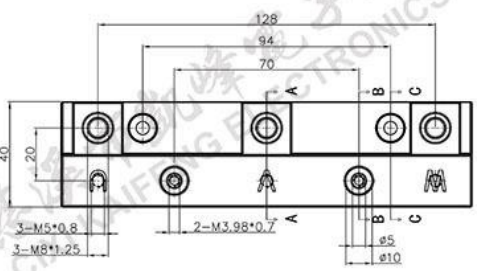



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2024.12.27	ZHANG	JIN

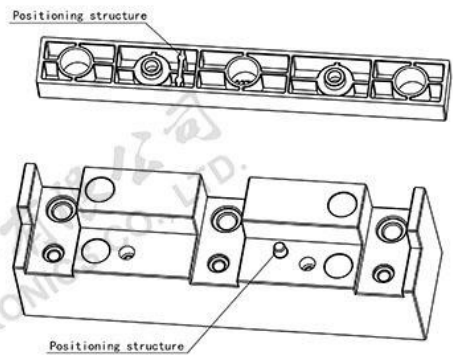

- Material
 - ◊Housing : PA66, UL94V-0
 - ◊Hex nut : M8, Stainless steel
 - ◊Hex nut : M5, Stainless steel
 - ◊Cover : PA66, UL94V-0
 - ◊Hex nut : M4, Stainless steel
- Electrical
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC6000V/1min
- Mechanical
 - Operating temperature: -30℃~+120℃
 - Torque: M4, 4.0N.m
 - M5, 7.0N.m
 - M8, 15.0N.m

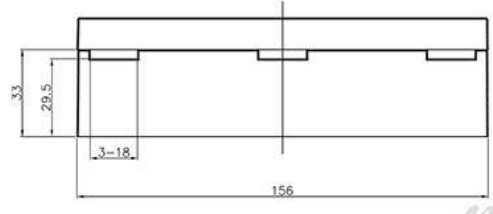

HOW TO ORDER
 2KF027C-XP-1 X-XXXXX
 ↓
 MODEL
 No. of poles: 3P
 ↓
 X-XXXXX
 ↓
 Customer Request
 Color:
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray
 1:Single Pitch
 2:Double Pitch

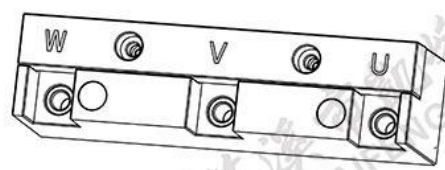

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>6	0.1/10	mm	2KF027C-3P-1K
~6	~10			
~10	~24			
~24	~30			
~30	~60			
~60	~100			
~100	~150			
~150	>150			
±0.15	±0.20			
±0.20	±0.30			
±0.30	±0.50			
±0.50	±0.70			
±0.70	±1.00			
±1.00	±1.30			
±1.30	±2			
DRAWING TYPE		CUSTOMER DRAWING		
SCALE		1:1 SHEET 1/1		
DRAWING NO.		W12007842		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD