REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2024.12.27	ZHANG	JIN

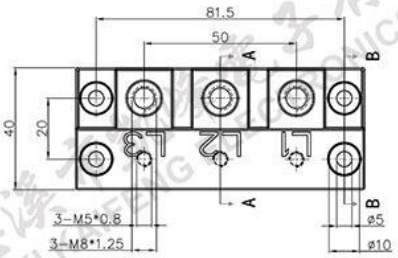



B-B



A-A

- Material
  - ①Housing : PA66, UL94V-0
  - ②Hex nut : M8, Stainless steel
  - ③Hex nut : M5, Stainless steel
  - ④Cover : PA66, UL94V-0
- Electrical
  Insulation resistance: 500MΩ/DC500V
  Withstanding Voltage : AC6000V/1min
- Mechanical
  Operating temperature:-30℃~+120℃
  Torque: M5, 7.0N.m
  M8, 15.0N.m

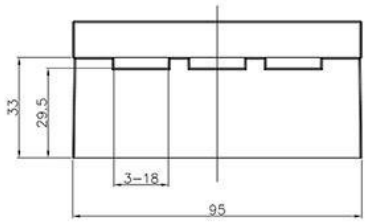



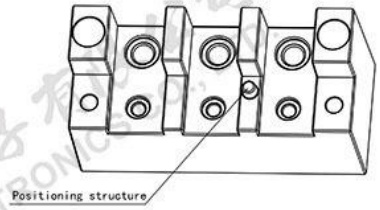

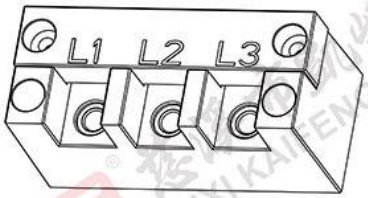

HOW TO ORDER

2KF027R-XP-1 X-XXXXX

- 2KF027R → MODEL
- XP → No.of poles: 3P
- 1 → 1:Single Pitch, 2:Double Pitch
- X → Color: G:Green, R:Red, K:Black, W:White, O:Orange, B:Blue, GR:Gray
- XXXXX → Customer Request

Pitch range			Nominal dimension range					
>0 ~ 6	>6 ~ 10	>10 ~ 24	>0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING		
SCALE	1:1	SHEET	1/1
DRAWING NO.	W12007832		

PROJECTION		TITLE	2KF027R-3P-1K
UNIT	mm		
SHEET SIZE	A4	SERIES	2KF027

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD