








REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
V1.0	DWG.REL	2024.4.26	ZHANG	JIN

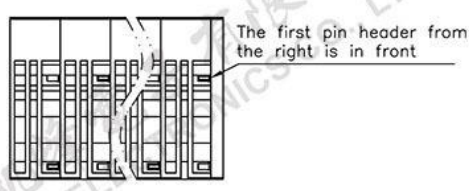

- Material
 - ØHousing 1: PA66, UL94V-0
 - ØHousing 2: PA66, UL94V-0
 - ØCover : PA66, UL94V-0
 - ØReed : Stainless steel
 - ØPin header :Copper alloy,Tin plated
- Electrical
 - UL IEC
 - Rated voltage : 300V 630V
 - Rated current : 40A 41A
 - Contact resistance : 20mΩ(Max)
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 24-8AWG;0.2-6mm²
- Mechanical
 - Operating temperature:-40℃~+105℃
 - Soldering temperature:250℃±5/5sec
 - Strip length: 9-10mm
- Conform to REACH and RoHS

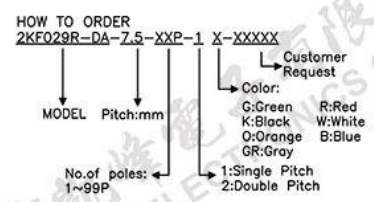

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>6	0.1/10	mm	2KF029R-DA-7.5-XXP-1X
~6	~10			
~10	~24			
~24	~30			
~30	~60			
~60	~100			
~100	~150			
>150	>150			
±0.15	±0.20			
±0.20	±0.30			
±0.30	±0.50			
±0.50	±0.70			
±0.70	±1.00			
±1.00	±1.30			
±1.30	±2°			

PROJECTION	UNIT	TITLE
mm		2KF029R-DA-7.5-XXP-1X
SHEET SIZE	A4	SERIES 2KF029R-DA
DRAWING TYPE	CUSTOMER DRAWING	
SCALE	1:1	SHEET 1/1
DRAWING NO.	W11001292	

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD