
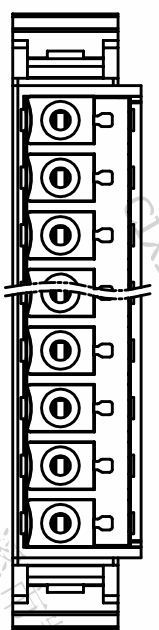
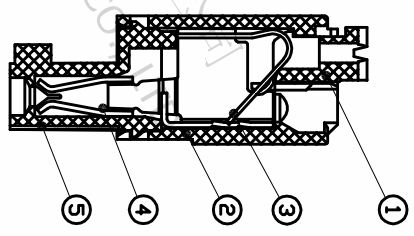
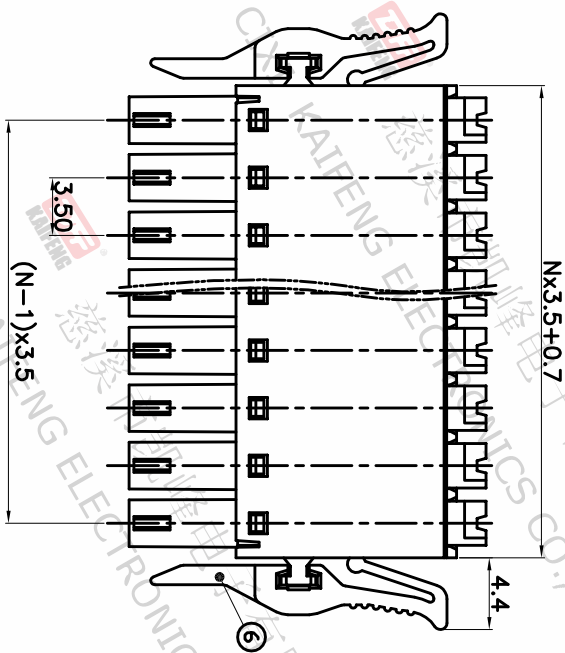
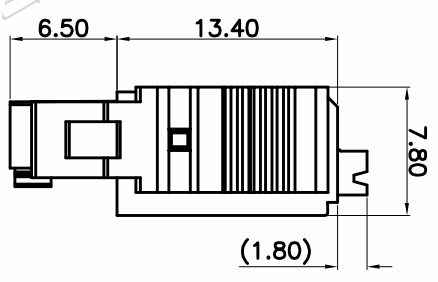


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.11.27	ZHANG	JIN

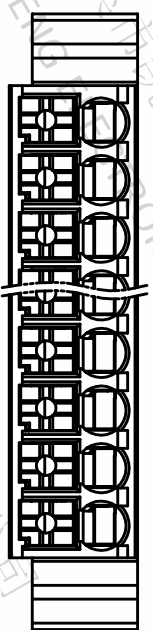


- Material
 ①Housing : PA66, UL94V-0
 ②Housing : PA66, UL94V-0
 ③Lead : Stainless steel
 ④Contact : Copper alloy, Tin plated
 ⑤Cover : PA66, UL94V-0
 ⑥Clip : PA66, UL94V-0

- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 10A 17.5A
 Contact resistance : 20mΩ(Max)
 Insulation resistance : 500MΩ/DC500V
 Withstanding Voltage : AC1600V/1min
 Wire range: 26-16AWG 0.14-1.5mm²

- Mechanical
 Operating temperature: -40°C~+105°C
 Soldering temperature: 250°C±5/5sec
 Strip length: 8-9mm

• RoHS compliance

HOW TO ORDER
 2KF003K-3.5-XXP-1 X-XXXXX

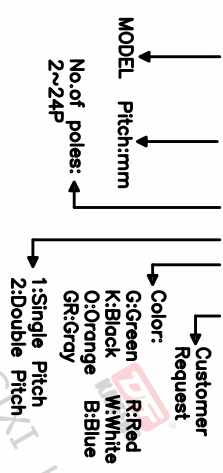

Pitch range	Nominal dimension range	PROJECTION
>0	>0	□
~6	>30	□
~10	>60	□
~24	>100	□
~30	>150	□
~60	>100	□
~100	>150	□
~150	>150	□
±0.15	±0.30	±2'
±0.20	±0.30	±2'
±0.30	±0.50	±2'
±0.70	±1.00	±2'
±1.30	±1.30	±2'

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10002102

TITLE	UNIT	SHEET SIZE	SERIES
2KF003K-3.5-XXP-1X	mm	A4	2KF003

DFE 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD