








REV	ECN	CONTENT	CHECK	DATE
V0.0		ORIGINAL	ZY	2019.09.26
V1.0		整理图纸	XCN	2020.06.05

电路板印刷尺寸

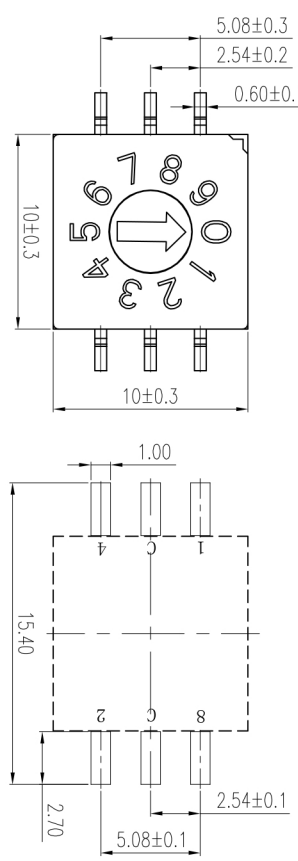


- 技术要求:
- 额定电流: 25mA, 24VDC
  - 开与关切换时: 100mA, 50VDC
  - 开与关不切换时: 100mA, 50VDC
  - 初始值: 50mΩ max
  - 寿命测试后: 100mΩ max
  - 绝缘电阻: 100MΩ min/250 VDC
  - 耐压: 250VAC for 1 minute
  - 操作力: 500gf, cm max
  - 机械寿命: 10000 步
  - 工作温度: -40℃~+85℃
  - 存储温度: -40℃~+85℃
  - 符合RoHS要求

焊接说明:  
回流焊: 240℃ (20S max), 峰值温度260℃,  
手工焊接: 30W电烙铁, 320±5℃, 3S max

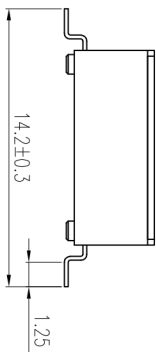

TYPE	POSITION	CODE	订购方式: 6KF001 B-3 S 1 0 R 4-0-X X X X													
0: ON	0: F	1	1	2	4	8	A: 直插式 B: 贴片式 脚位类型: 4: 4X1 3: 3X3 S: 标准(灰色) Y: 黄色 R: 真实代码 C: 反向印刷 特殊编码 0: 管装 T: 裁带包装 4: 4.5mm 高 5: 5.5mm 高									
1: E	1	2	4													
2: D	2	4	8													
3: C	3	4	8													
4: B	4	4	8													
5: A	5	4	8													
6: A	6	4	8													
7: B	7	4	8													
8: 7	8	4	8													
9: 6	9	4	8													
10: STEP	10	4	8													



APP.	DATE	NAME	6KF001B-3SXXRX-X
CHK.	DATE	DWGNO.	W21000021
DWG.	DATE	SHEET	1/1
UNITS	MM	SCALE	1:1
		PROJECTION-METHOD	

**DFE** 慈溪市凯峰电子有限公司  
CIXI KAIFENG ELECTRONICS CO., LTD