
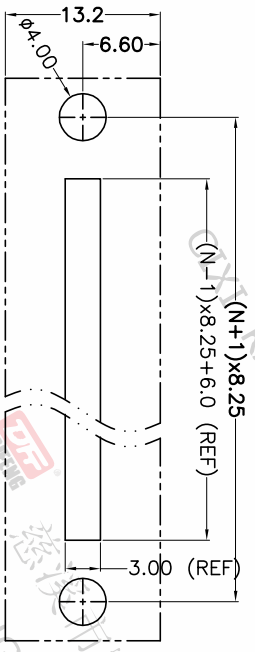
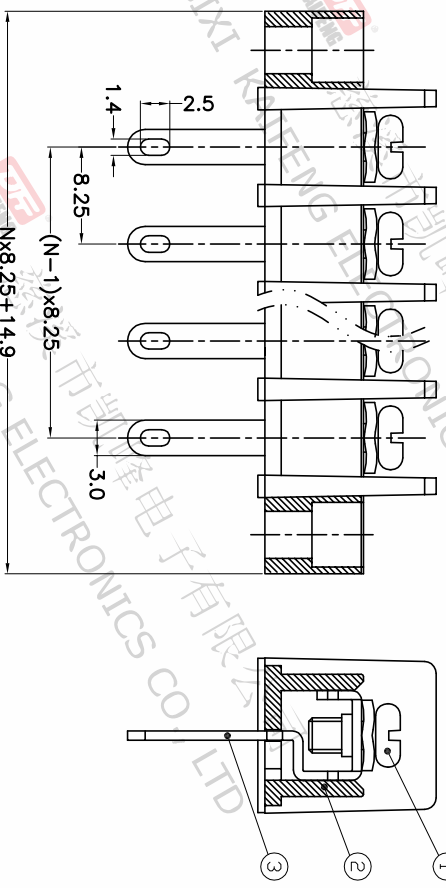


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.20	LIUZH	JIN

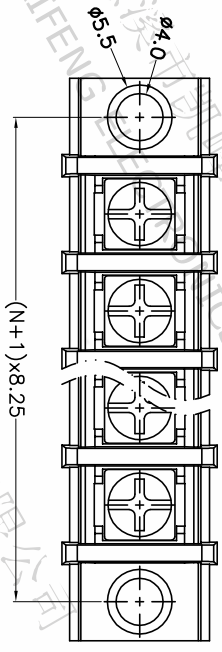

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
>6	>30	□
>10	>60	□
~ 6	~ 100	□
~ 10	~ 150	□
~ 24	~ 300	□
±0.15	±0.30	±2°
±0.20	±0.50	±2°
±0.30	±0.70	±2°
±0.50	±1.00	±2°
±1.30	±2.00	±2°


DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W12000592

PROJECTION	UNIT	TITLE
□	mm	KF-30H-8.25-XXP-1X
□	A4	SERIES KF-30H

- Material  
 ØScrews : M3.0 steel, Ni plated  
 ØHousing : PA66,UL94V-0  
 ØTerminal : Brass, Tin plated
- Electrical  
 ULC  
 IEC  
 Rated voltage : 300V 450V  
 Rated current : 20A 24A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min  
 Wire range: 22-12AWG 2.5mm<sup>2</sup>
- Mechanical  
 Operating temperature: -40°C~+105°C  
 Soldering temperature:250°C±5/5sec  
 Torque: 0.5N.m (4.43Lb.in)
- RoHS compliance

HOW TO ORDER

KF-30H-8.25-XXP-1 X-XXXXX

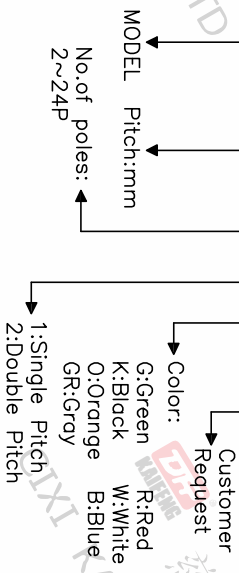

**DFE** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD

