
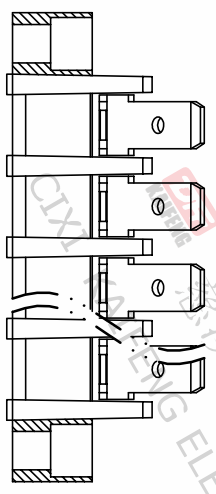


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.22	LiuZH	JIN

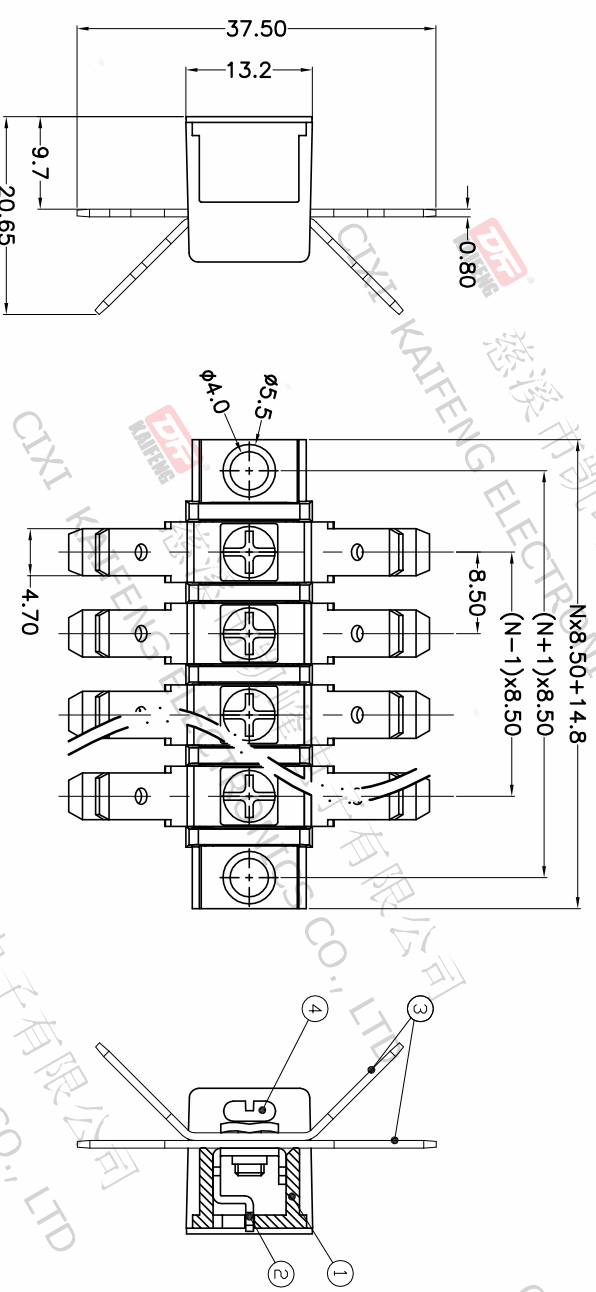

- Material
 - ① Housing : PA66, UL94V-0
 - ② Terminal : Brass, Ni plated
 - ③ Plane film: Brass, Ni plated
 - ④ Screws : M3.0 steel, Ni plated

• Electrical

- Rated voltage : 300V 450V
- Rated current : 20A 24A
- Contact resistance : 20mΩ(Max)
- Insulation resistance: 500MΩ/DC500V
- Withstanding Voltage : AC2000V/1min
- Wire range: 22-12AWG 2.5mm²


• Mechanical

- Operating temperature: -40°C ~ +105°C
- Soldering temperature: 250°C ± 5 / 5sec
- Torque: 0.5N.m (4.43Lb.in)

• RoHS compliance

HOW TO ORDER

KF-35B-8.5-XXP-1 X-XXXXX

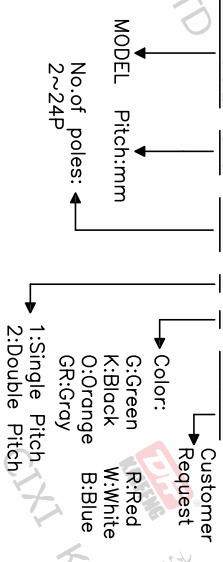

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	0.1/10	mm	KF-35B-8.5-XXP-1X
~6	~30			
~10	~60			
~24	~100			
±0.15	±0.30	±2°		

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	SERIES
SCALE	1:1	A4	KF-35B

DRAWING NO.	SHEET	OF
W12001032	1	1

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD