
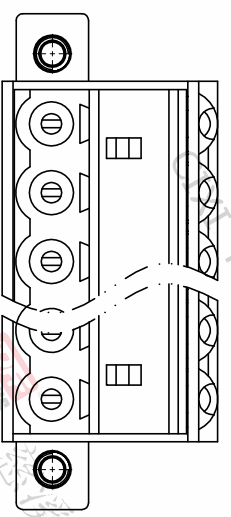
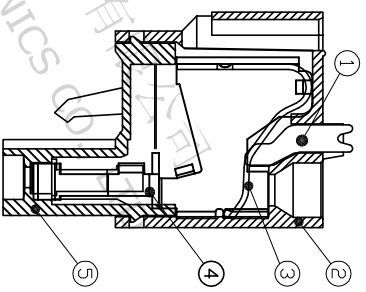
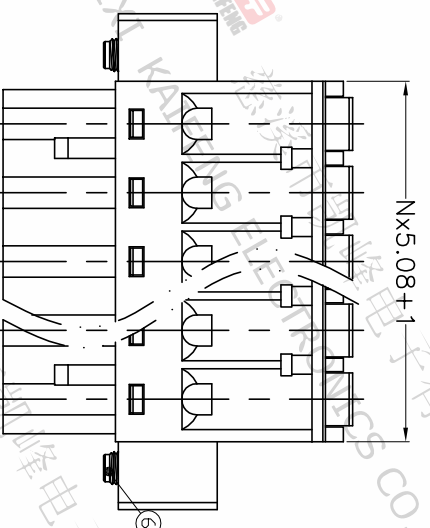
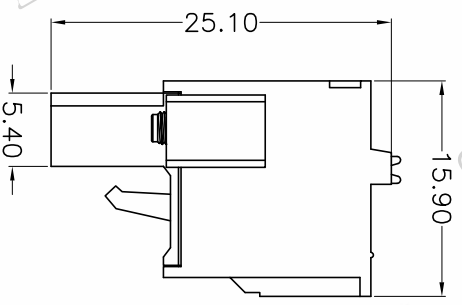


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.30	ZHANG	JIN

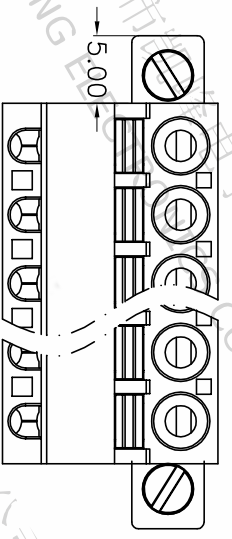

- Material
 - ①Button : PA66, UL94V-0
 - ②Housing : PA66, UL94V-0
 - ③Reed : Stainless steel
 - ④Contact : Copper alloy, Tin plated
 - ⑤Cover : PA66, UL94V-0
 - ⑥Screw : M2.5 steel, Zinc plated


- Electrical

UL	IEC
Rated voltage : 300V	320V
Rated current : 15A	20A
Contact resistance : 20mΩ(Max)	
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2000V/1min	
Wire range: 28-14AWG	2.5mm ²

- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ± 5/5sec
 - Strip length: 10-11mm

• RoHS compliance

HOW TO ORDER
 KEF2EDGKDM-5.08-XXP-1 X-XXXXX

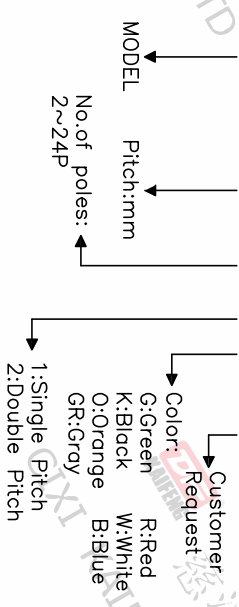

Pitch range	Nominal dimension range	0.1/10	±2°
>0	>0	0.1/10	
~6	~30		
~10	~60		
~24	~100		
~30	~150		
±0.15	±0.30		
±0.20	±0.30		
±0.30	±0.50		
±0.70	±1.00		
±1.30	±1.30		

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10000472

PROJECTION	UNIT	TITLE
UNIT	mm	KEF2EDGKDM-5.08-XXP-1X
SHEET SIZE	A4	SERIES KEF2EDGKDM

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD