
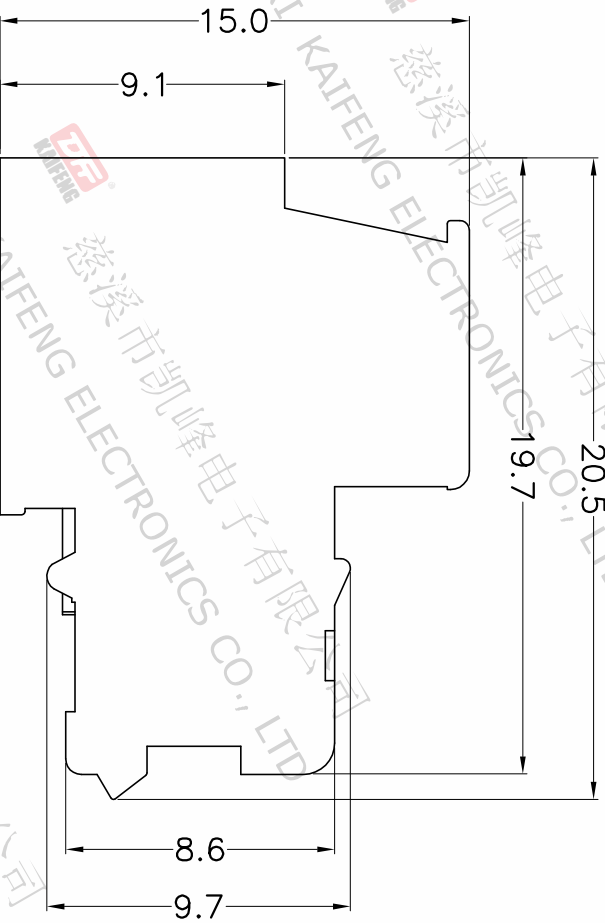


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.18	DENG	JIN

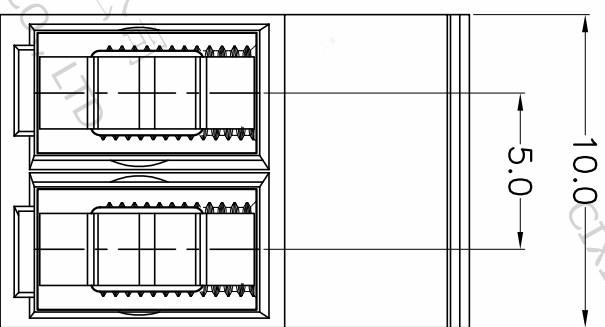

- Material
Screws : M3.0 steel, Zinc plated
Reed : Copper alloy, Ni plated
Housing : PA66, UL94V-0
- Electrical
UL IEC
Rated voltage : 300V 250V
Rated current : 10A 24A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 28-16AWG 2.5mm²
- Mechanical
Operating temperature: -40°C~+105°C
Soldering temperature: 250°C±5/5sec
Torque: 0.5N.m (4.43Lb.in)
Strip length: 5-6mm
- RoHS compliance

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	0.1/10	mm	KF332-B-5.0-2P
~6	>10			
~10	24			
~30	30			
~60	60			
~100	100			
~150	150			
±0.15	±0.20	±0.30	±0.50	±0.70
				±1.00
				±1.30
				±2*

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W15000912

PROJECTION	UNIT	TITLE
	mm	KF332-B-5.0-2P
SHEET SIZE	SERIES	
A4	KF332-B	

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

