
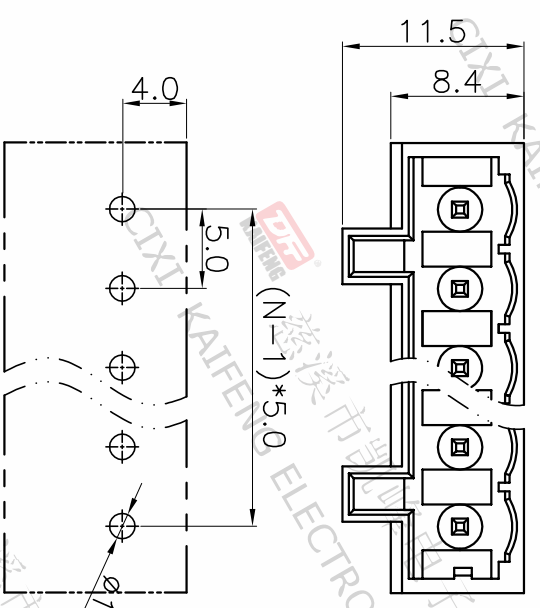


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

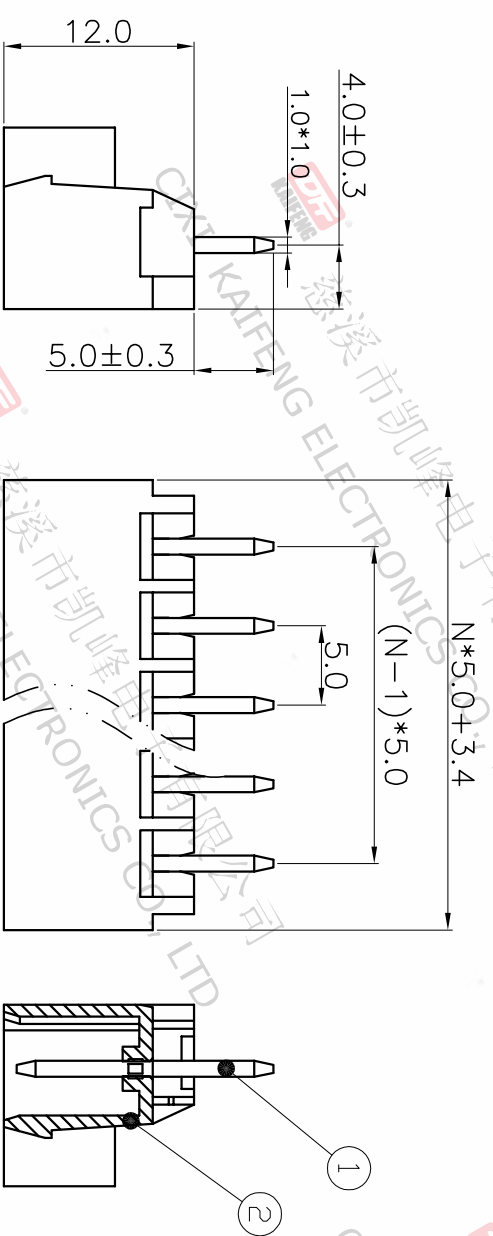

P.C.B.LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	~30	≤
~10	~60	≤
~24	~100	≤
~30	~150	≤
±0.15	±0.30	±2°
±0.20	±0.30	±2°
±0.30	±0.50	±2°
±0.70	±1.00	±2°
±1.30	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W16000082


- Material
  - ①Pin header: Copper alloy, Tin plated
  - ②Housing: PA66, UL94V-0

- Electrical
  - UL
  - Rated Voltage: 300V 400V
  - Rated Current: 15A 16A
  - Contact Resistance: 20mΩ
  - Insulation Resistance: 500MΩ/DC500V
  - Withstanding Voltage: AC1500V/1Min

- Mechanical
  - Temperature Range: -30°C ~ +105°C
  - MAX Soldering: +250°C, (5 Seconds)

• RoHS compliance

HOW TO ORDER  
 KF450-V-5.0-XXP-1 X-XXXXXX

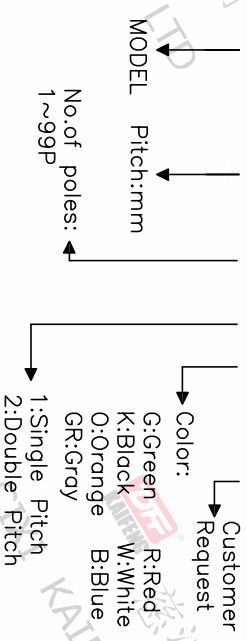

PROJECTION	TITLE
UNIT	KF450-V-5.0-XXP-1X
SHEET SIZE	A4
SERIES	KF450

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD